

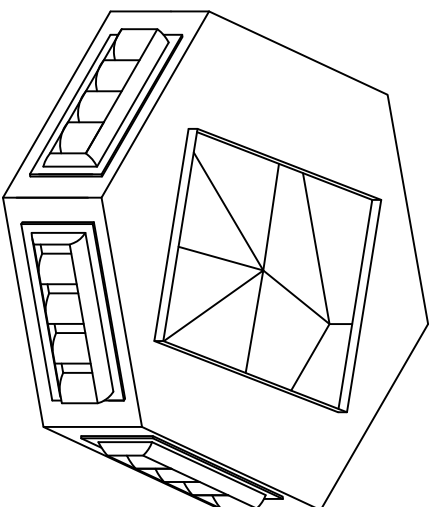


TOP VIEW

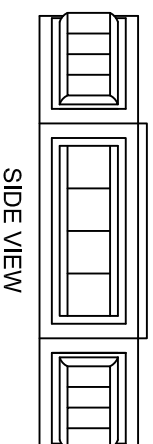

ISO VIEW

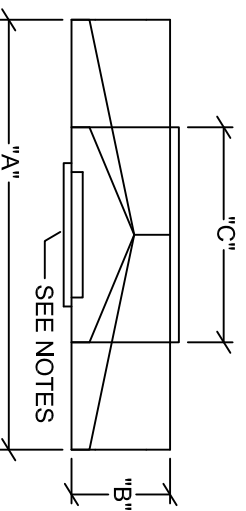

SIDE VIEW

MODEL	"A"	"B"	"C"	LOUVER SIZE	CFM RANGE
6WAY-1	36"	11"	18"	6" X 12"	1,400-2,000
6WAY-2	48"	11"	24"	6" X 18"	2,400-3,400
6WAY-3	60"	15"	32"	10" X 20"	4,000-5,200
6WAY-4	60"	17"	32"	12" X 20"	6,000-7,200
6WAY-5	60"	17"	32"	12" X 20"	8,000
6WAY-6	60"	20"	32"	15" X 20"	10,000

R-8 LINER INSULATION STANDARD ON ALL MODELS
 FACTORY PRIMED AND PAINTED (WHITE)
 OPTIONAL SCREWDRIVER OPERATED OPPOSED BLADE DAMPERS
 ADJUSTABLE HORIZONTAL AND VERTICAL THROW/
 16 X 12 REGISTER FOR 8,000 AND 10,000 CFM MODELS ONLY